

IES Files 🕁

IP68 40"


R

IK10

(ዛ)

CERTIFIED

# THUNDER25 (Model)



## TECHNICAL INFORMATION

Watt	2W				
Luminaire	Up to 225Im				
ССТ	3000K – 4000K				
CRI	>80				
Wiring	ICC 350mA, ICC 700mA				
LED life time	> 60000h - L80 - B20 (Ta 25°C)				
Color	Stainless Steel - 30				

## DESCRIPTION

#### Construction

- AISI 316L stainless steel body and trim.
- Silicone rubber gaskets.

#### **Electrical & Optics**


- High-efficacy LEDs with standard 3000K, 4000K (2700K or other CCTs available on request).
- PMMA lenses for LEDs.
- Clear PMMA screen.
- To be operated only with constant voltage 24Vdc Class 2 remote drivers (order separately).


#### Listings

- UL certified to U.S. and Canadian standards, suitable for wet locations (cULus mark).
- Rated IP68 per EN60598.
- Luminaire rated for -40°C minimum ambient temperature.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.

## Installation

- Recessed installation.
- Supplied with recessed installation box made of engineering plastic.
- Other recessed installation boxes made of engineering plastic or of AISI 316L stainless steel available.
- Supplied with power cord. 22AWG conductors.



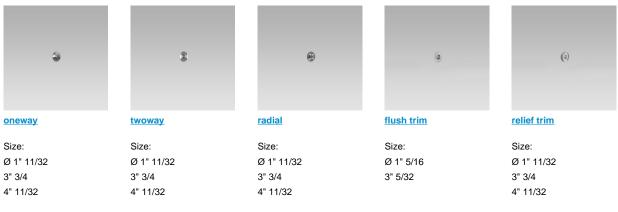

#### OPTICS



See accessories in the next page



# THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code Code Ref. 1099223X 07290



А

TECHNICAL INFORMATION

Weight 0.13 lb

## STAINLESS STEEL AISI 316L INSTALLATION BOX.

Arcluce Code Code Ref.	1099221 O7292	x		
	TEC	CHNICAL INFORMAT	ION	
La m		<b>ight</b> O	.46 lb	

# THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code Code Ref.	1099222X O7298			
	TECHNICAL	INFORMATION		
<b>_</b>	Weight	0.04 lb		