STONE180 short (Model)

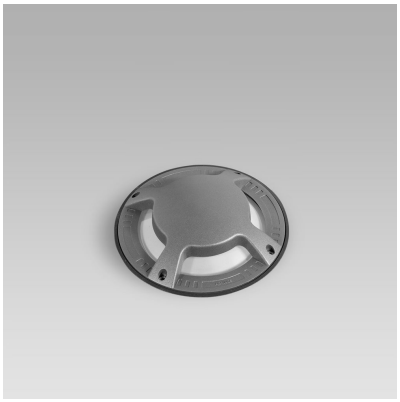

TECHNICAL INFORMATION

IES Files

Watt	10W
Luminaire	Up to 190lm
CCT	3000K – 4000K
CRI	>80
Wiring	
LED life time	> 60000h - L80 - B20 (Ta 25°C)
Color	Grey - 16 / Aluminium - 21

DESCRIPTION

VERSIONS *(Click on below link to configure your product)*

oneway

Size:
Ø 7" 3/32
4" 13/16
5" 5/16



twoway

Size:
Ø 7" 3/32
4" 13/16
5" 5/16



wide light - radial

Size:
Ø 7" 3/32
4" 13/16
5" 5/16

oneway grazing illumination

Size:
Ø 7" 3/32
4" 13/16
5" 5/16

twoway grazing illumination

Size:
Ø 7" 3/32
4" 13/16
5" 5/16

radial grazing illumination

Size:
Ø 7" 3/32
4" 13/16
5" 5/16

OPTICS

IP67

IK10

8800

See accessories in the next page

THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code **1099208X**
Code Ref.

TECHNICAL INFORMATION

Weight	0.44 lb

JUNCTION BOX IP68 - 4 WAYS - 2/3 POLES.

Arcluce Code **1099259X**
Code Ref.



TECHNICAL INFORMATION

Weight	0.11 lb

IP68 LINEAR JOINT - 2 WAYS - 3 POLES.

Arcluce Code **1099409X**
Code Ref.

TECHNICAL INFORMATION

Weight	0.07 lb